


406 KLIPLOK
CHROMADEK silicone
polyester finish
fixed to PURLINS with
KL 65 CLIPS fixed to
TIMBER PURLINS with
two CADUIM PLATED
tek 3 no 10, 24 x 16mm
long self TAPPING screws



1:175

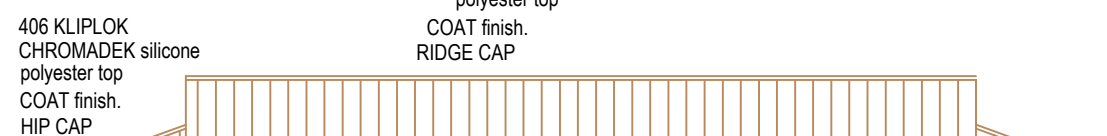


1:175



1:175




(AREA = 74,4 Sq. m)

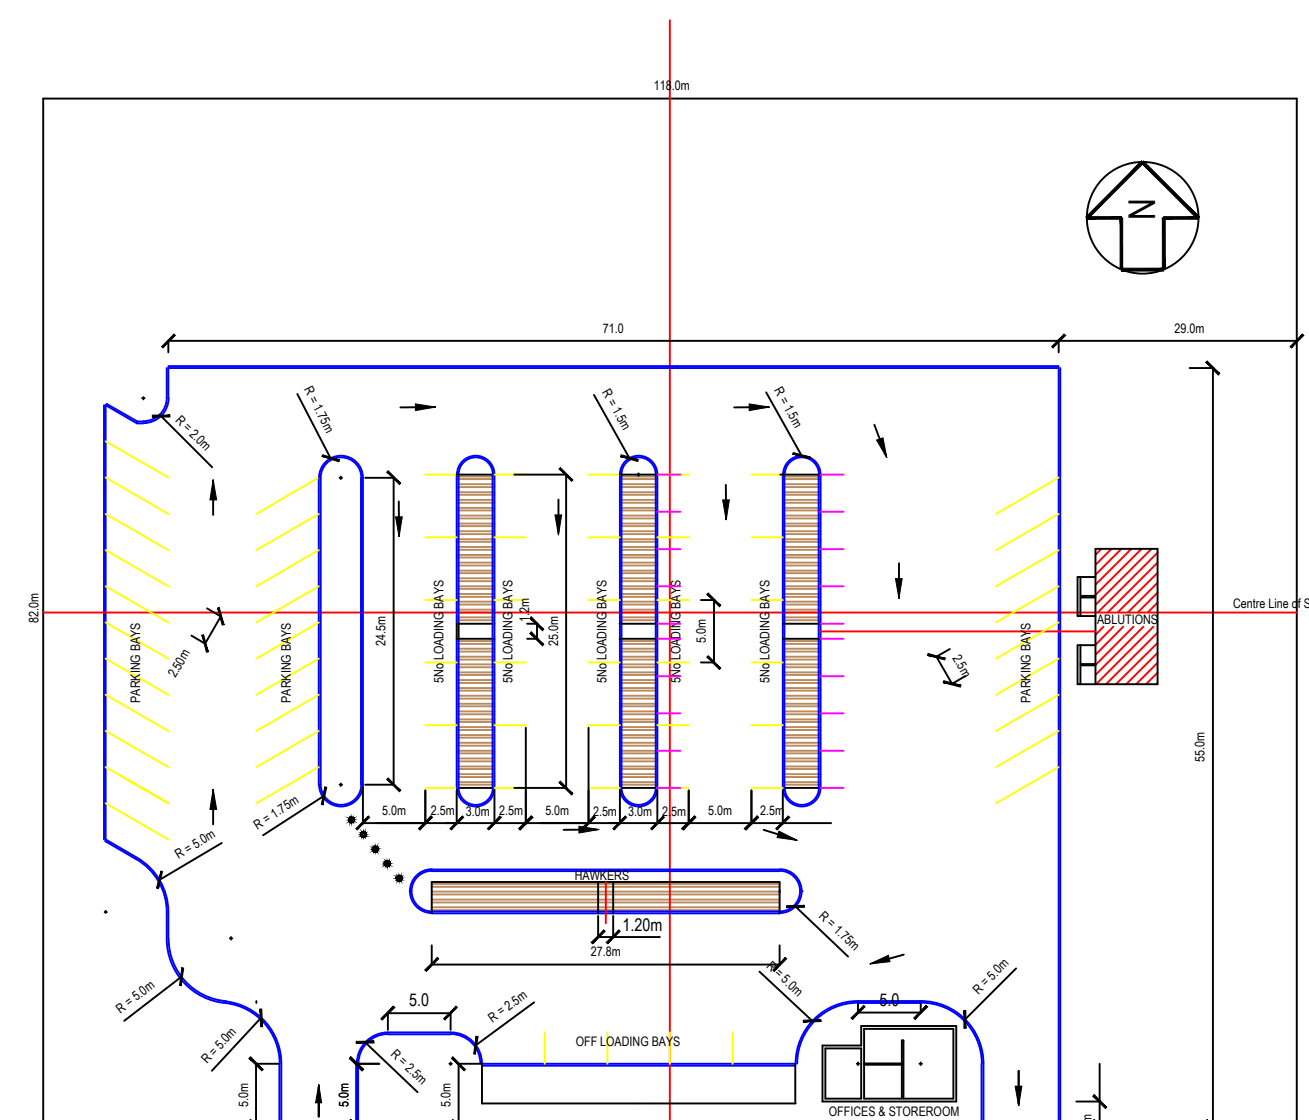

SITE LAYOUT

406 KLIPLOK
CHROMADEK silicone
polyester top
COAT finish.
HIP CAP

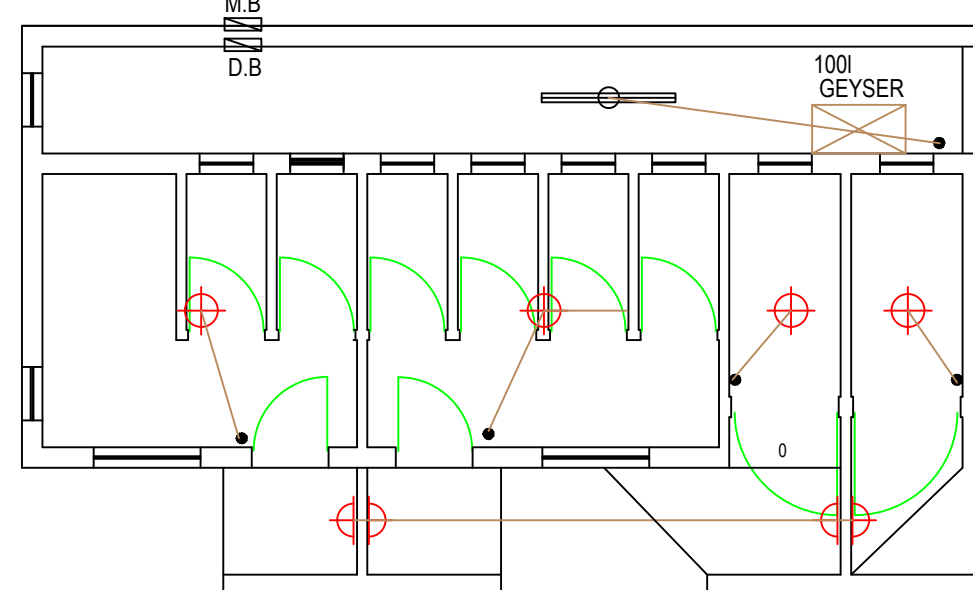1:17^a

ELECTRICAL LAYOUT

1:175

406 KLIPLOK
CHROMADEK silicone
polyester finish
COAT finish
RIDGE CAP

406 KLIPLOK
CHROMADEK silicone
polyester finish
fixed to PURLINS with
KL 65 CLIPS fixed to
TIMBER PURLINS with
two CADMIUM PLATED
screws no 10, 24 x 150mm
long self TAPPING screws

Bottom of WALLPLATE
2975mm above U.F.L.


100 GEYSER

U.F.L. 255mm abv. G.L.

30mm CEMENTSAND
SCREENED on 80mm th
FLOOR CONCRETE on
UPVC PLASTIC sheet
as EPIC or 250mm th
WELL CONSOLIDATED
HARDWARE with ANT-POISON

SECTION A\A

1:175

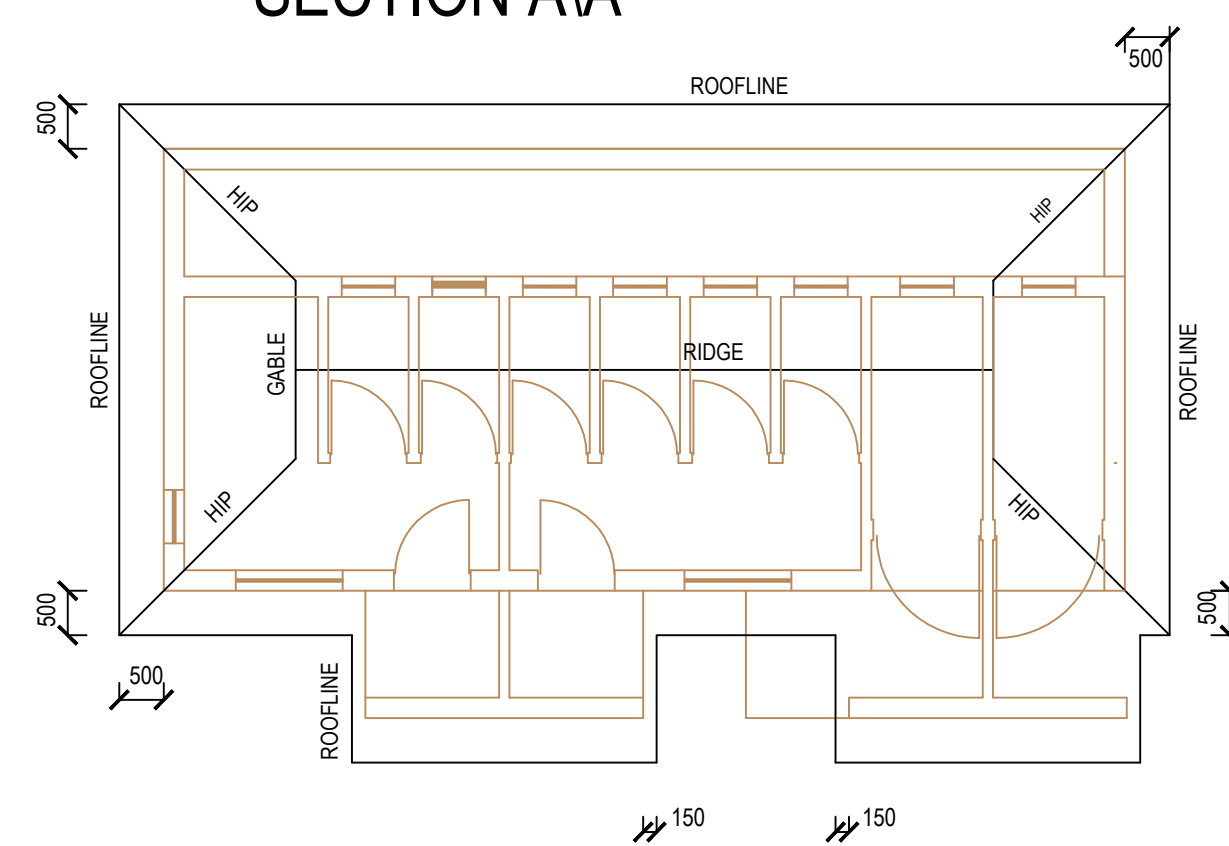

ROOF PLAN

1-175

406 KLIKLOP CHROMADEK SILICONE POLYESTER top coat finish
fixed to PURLINS with KL 65 CLIPS fixed to 114 x 38mm
S.A PINE PURLINS with two CADMIUM PLATED tek 3 no 10, to
PURLINS with 24 x 16mm long self TAPPING screws,
24 x 16mm long self TAPPING screws, as per APPROVED DESIGN
& SPECIALIST DESIGN COMPLETE WITH GUARANTEE ROOF TRUSSES
AND RAFTERS ANCHORED TO WALLS AND COLUMNS WITH GALVANISED
STEEL STRUTS OR WIRE BUILT INTO BRICKWORK MIN. DEPTH OF
800mm GUTTER DOWNPIPES AND WATERNATK PROVISIONAL

CEILING

4mm CLADIT A/C SHEETS FIXED TO UNDERSIDE OF TRUSSES ONTO 38mmx38mm BRANDERS AT MAX. SPACING OF 300x300mm. 75mm COVERED CORNICE.

WALLS


BRICKWORK/BLOCKWORK (WHERE APPL) PLASTERED OR BAGGED EXTERNALLY, PLASTERED AND PAINTED INTERNALLY. BRICKFORCE - FOUNDATIONS EVERY 3rd LAYER, TOP STRUCTURE EVERY 5th LAYER AND OVER WINDOWS & DOORS 3 LAYERS WINDOW CILLS-INTERNAL PLASTERED,EXTERNAL PLASTERED/SLOPING. DPC UNDER ALL CILLS PRECAST LINTOLS OVER OPENINGS. PROVIDE 375 MICRON BRICK GRIP DPC.

FLOORS

FLOORS
25mm SCREED ON 75mm CONCRETE SURFACE
BED ON 250um WATERPROOF SHEET ON WELL
COMPACTED FILL TREATED WITH 10 YEAR GUARANT.

FOUNDATIONS
650x230mm MASS CONCRETE STRIP FOOTING
TO EXTERNAL WALLS.
450x150mm DEEP THICKENING OF SURFACE
BED UNDER INTERNAL WALLS.
ALL TREATED WITH 10YEAR GUARANTEE ANTPROOF

ELECTRICAL LEGEND:

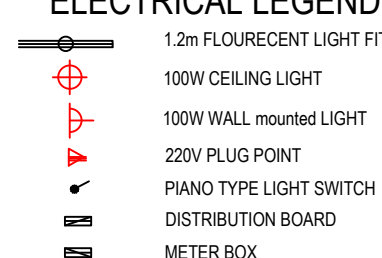

DRAINAGE:

urinal "TE" BARRON BOWL GRADE 304 STAINLESS
w.c MODEL HCL GRADE 304 STAINLESS STEEL
hwb MODEL WB001 304 STAINLESS STEEL
i.e INSPECTION EYE
c.e CLEANING EYE
g GULLY
m.h MANHOLE

[illegible]